SEDIR







AVAILABLE STOCKED ITEMS:

10mm Field Tiles						
SIZE	FINISH		COLORS			
12"× 24"	Natural		Bianco Grigio			
10mm Mosaics						
SHEET SIZE	TYPE	FINISH	COLORS			
12"x 12"	2"x 2" Mosaic	Natural	Bianco Grigio			

MADE TO ORDER FIELD TILES AND MOSAICS:

Minimum quantity required. Contact your sales representative for more information.

This represents a small portion of the mosaic patterns we offer.

We can cut any field tile to create a custom mosaic or field tile size as specified.

FIELD TILES		CUBES		BASKETWEAVE	
	Any 24" field tile can be cut down to a smaller size in any length and width combination with a 1" minimum.		2" 4"		1³/ ₈ ″x3″ 2″x4″
		BRICKS		DIAMONDS	
			1"x2" 1"x3" 1 ³ / ₈ "x3" 2"x4"		2"
FIELD SHAPES*		CHEVRONS		HERRINGBONE	
Half Hexagon	6.7" Base		2"x12"		1"×2" 2"×4" ⁵ / ₈ "×4"
Diamond	4"	OCTAGONS		HEXAGONS	
⟨	6"				dons
Chevron	2"x12" 6"x24"		2" w/ 0.6" Squares		1 ¹ / ₈ " 2"
TRAPEZO	ID W/ DOT	SQUARES		RECTANGLES	
	4"x2 ¹ / ₂ " w/ ⁵ / ₈ " Dot		1"x1" 2"x2" 1 ³ / ₈ "x1 ³ / ₈ " 3"x3"		1"x2" 1"x4"

^{*}Other sizes available upon request All Sizes are Nominal.



2"X 2" MOSAIC



Bianco

Bianco






Grigio

Grigio

EXTREME variation is inherent in this tile. Colors shown may vary from actual product. Final selection should be made from actual product samples. Products and availability are subject to change, please refer to our website for the most up to date selection.



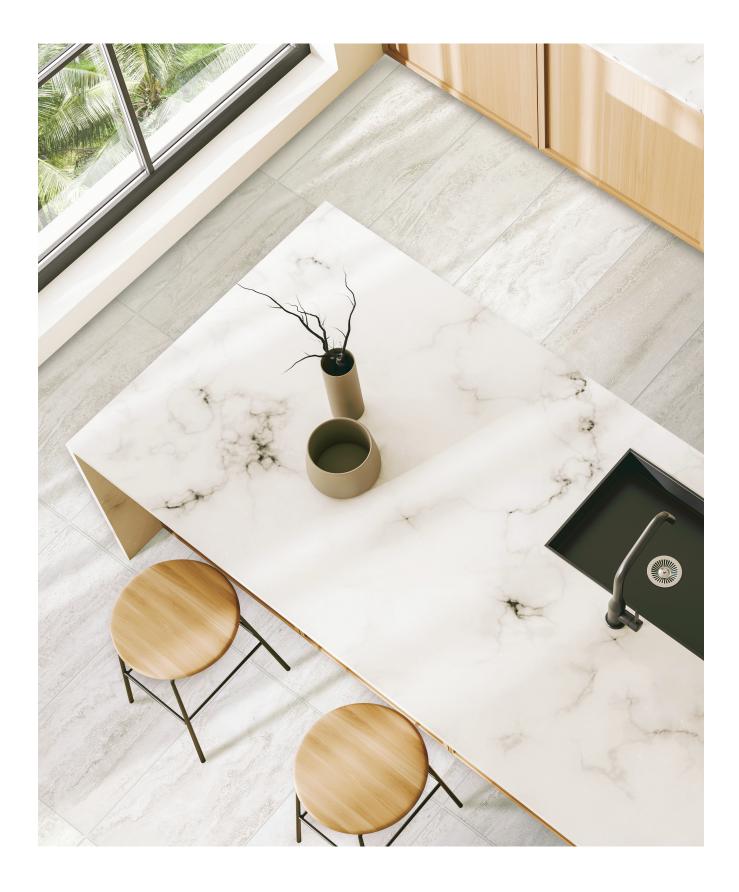

12"x 24" Field Tile Grigio





Features	Test Method	Value	
Thickness	-	10mm	
Water Absorption	ASTM C373	≤ 0.5	
Wedging	ANSI A137.1	Compliant	
Mohs Hardness	ASTM C499	7	
Breaking Strength	ANSI A137.1	≥ 250lbf - Compliant	
Warpage	ANSI A137.1	edge ± 0.4% or ± 0.05in diagonal ± 0.4% or ± 0.07in	
Chemical Resistance	ASTM C650	Resistant	
Freeze Resistance	ASTM C1026	Resistant	
DCOF	ASTM BOT 3000 test	≥ 0.42	

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

All material must be inspected prior to installation. Absolutely no claims will be accepted after installation.

Product Info:

- Glazed Porcelain Tile
- Natural Finish
- 10mm Thickness
- Pressed Edge
- Frost Resistance = Yes
- V4 **EXTREME** Variation



www.genrose.com



www.genrose.com