## **JOURNEY**







24"x48" Deco in Argent 24"x48" Field Tile in Argent



24"x48" Deco in Bone 24"x48" Field Tile in Bone





24"x48" Deco in Bone 24"x48" Field Tile in Bone

### **AVAILABLE IN:**

#### Field Tiles

Rectified Edge

30"x60" 10mm Matte Finish 24"x48" 9.2mm Matte Finish 36"x36" 10mm Matte Finish

12"x24" 8.8mm Matte Finish

#### Decos

Rectified Edge

24"x48" 9.2mm Deco Matte Finish 12"x24" 8.8mm Deco Matte Finish

- All sizes are NOMINAL

#### Mosaics

2"x2" Mosaic Matte Finish

#### **Trim Pieces**

4"x36" Bullnose Matte Finish



### MADE TO ORDER FIELD TILES AND MOSAICS:

This represents a small portion of the mosaic patterns we offer.

We can cut any field tile to create a custom mosaic or field tile size as specified.

FIELD TILES		CUBES		BASKETWEAVE	
	Any 24" field tile can be cut down to a smaller size in any length and width combination with a 1" minimum.		2" 4"		1³/ <sub>8</sub> ″x3″ 2″x4″
		BRICKS		DIAMONDS	
			1"x2" 1"x3" 1 <sup>3</sup> / <sub>8</sub> "x3" 2"x4"		2"
FIELD SHAPES*		CHEVRONS		HERRINGBONE	
Half Hexagon	6.7" Base		2"x12"		1"x2" 2"x4" <sup>5</sup> / <sub>8</sub> "x4"
Diamond	4"				
		OCTAGONS		HEXAGONS	
Hexagon  Chevron	6" 2"x12" 6"x24"		2" w/ 0.6" Squares		1 <sup>1</sup> / <sub>8</sub> " 2"
TRAPEZOID W/ DOT		SQUARES		RECTANGLES	
	4"x2 <sup>1</sup> / <sub>2</sub> " w/ <sup>5</sup> / <sub>8</sub> " Dot		1"x1" 2"x2" 1 <sup>3</sup> / <sub>8</sub> "x1 <sup>3</sup> / <sub>8</sub> " 3"x3"		1"x2" 1"x4"








Noir Argent



Bone



## 2"X2" MOSAIC







Argent


Bone






12"X24" DECO

24"X48" DECO





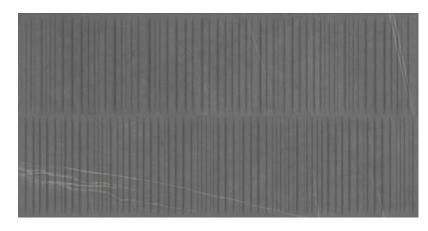

Noir

Noir







Argent


Argent





Bone

Bone

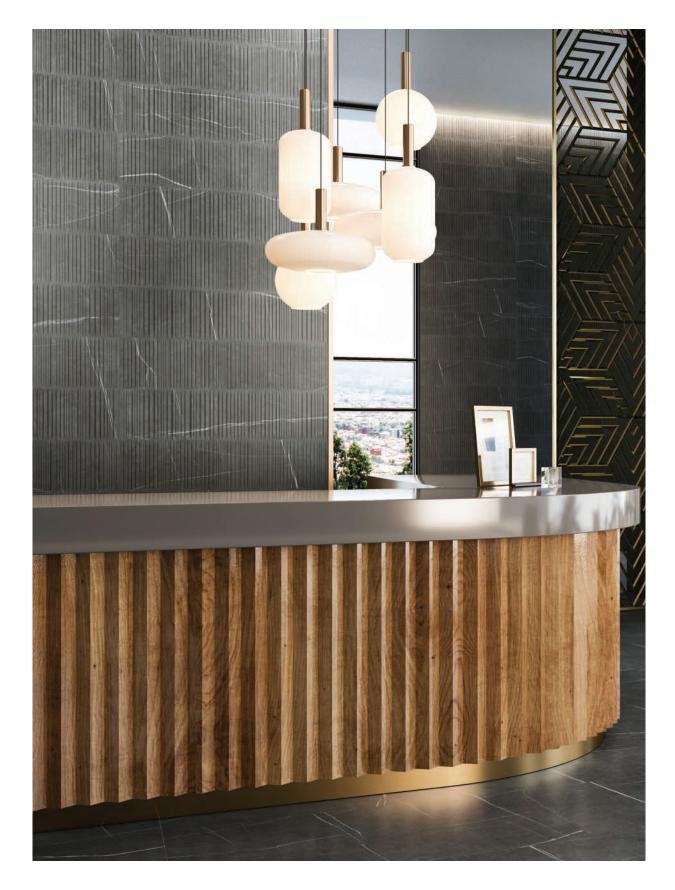

24"x48" Deco in Noir 24"x48" Field Tile in Noir



# **JOURNEY**Color Body Porcelain Tile

Features	Test Method	Value		
Length and Width		± 0.1 %		
Thickness	ISO 10545-2	± 3.0 %		
Straightness of Sides		± 0.1 %		
Rectangularity		± 0.2 %		
Surface Flatness		± 0.2 %		
Water Absorption	ISO 10545-3	≤ 0.1 %		
Breaking Strength	ISO 10545-4	> 2600 N		
Modulus of Rupture		> 53 N/mm²		
Abrasion Resistance	ISO 10545-7	5		
Coefficient of Linear Thermal Expansion ( 1/K )	ISO 10545-8	6.7 x 10 <sup>-6</sup>		
Thermal Shock Resistance	ISO 10545-9	Resistant		
Crazing Resistance	ISO 10545-11	Resistant		
Frost Resistance	ISO 10545-12	Resistant		
Chemical Resistance	ISO 10545-13	Household/ Swimming Pool Salts	Low Concentration	High Concentration
		GA	GLA	GHA
DCOF (WET)	<b>DC0F (WET)</b> ANSI A137.1 R10 /B / Class 2			
Stain Resistance	ISO 10545-14	5		

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

#### **Product Info:**

- Color Body Porcelain Tile
- Matte Finish
- 8.8mm | 9.2mm | 10mm Thicknesses
- Rectified Edge
- PEI Rating = 5
- V3 Moderate Variation
- Frost Resistance = Yes



www.genrose.com



www.genrose.com